

INTERIOR INSTALLATION



EUROCLASSES M1



2B2

CERTIFIED 2018 • EN 356

PERFORMANCE

EN 410

SUPPORT	PET
SUPPORT THICKNESS	100
PROTECTOR	Silicone PET
THICKNESS PROTECTOR	23
ADHESIVE	Acrylic polymer
TREATMENT	Anti-scratch
COLOR	colorless
APPLICATION FACE	Interior
BREAKAGE CHARGE	5 DA N/CM
EXTENSION OF THE BREAK	100%
GUARANTEE	10
APPLICATION TEMPERATURE	+ 5°C
APPLICATION	Soapy water

WARRANTY

10 years

DESCRIPTION

A clear interior safety film for glazing up to 3 m². Holds glass fragments in place on impact, protecting people nearby. 98% UV blocked.



DURABILITY

Manufacturer warranty: 10. Actual service life depends on exposure, glazing quality, correct installation and maintenance.



MAINTENANCE

30 days after installation.



STORAGE

2 years from delivery. Store away from excessive humidity and sunlight, at a temperature below 38°C.

APPLICATION METHOD

The surface to be bonded must be free of dust, grease, or any other contaminant. Some materials like polycarbonate can cause bubbling. A compatibility test is therefore recommended.

GLAZING COMPATIBILITY



GLAZING COMPLIANCE


Glazing exposed to the sun must be of good quality and installed in compliance with glazing standards to guarantee the performance and durability of the film.



IMPORTANT NOTE

To ensure perfect uniformity across a project, it is recommended to exclusively use films from the same production batch and not mix different widths. Slight variations in tint or appearance may occur from one batch to another or depending on the widths, which could lead to visible differences once the strips are installed side by side.

INTERIOR INSTALLATION

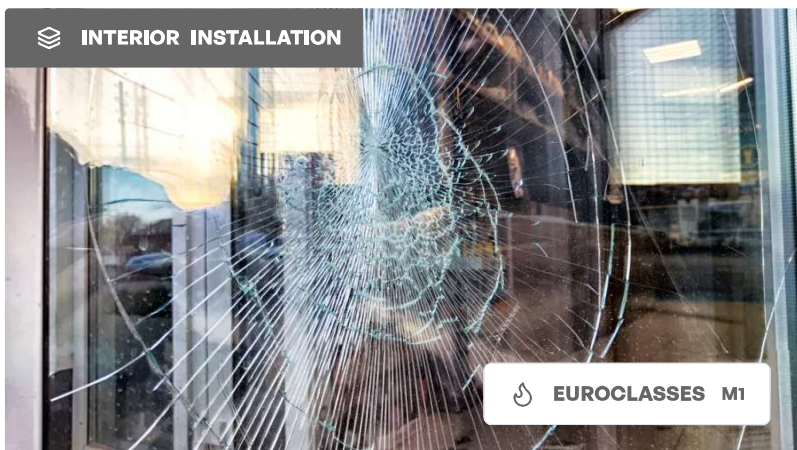

EUROCLASSES M1

DESCRIPTION

A reinforced clear interior safety film for glazing over 3 m². 200 µm thickness for increased impact resistance. 98% UV blocked.



DURABILITY

Manufacturer warranty: 10. Actual service life depends on exposure, glazing quality, correct installation and maintenance.



MAINTENANCE

30 days after installation.



STORAGE

2 years from delivery. Store away from excessive humidity and sunlight, at a temperature below 38°C.

APPLICATION METHOD

The surface to be bonded must be free of dust, grease, or any other contaminant. Some materials like polycarbonate can cause bubbling. A compatibility test is therefore recommended.

GLAZING COMPATIBILITY



SINGLE



TEMPERED



DOUBLE <1.20M



DOUBLE >1.20M



LAMINATED



GLAZING COMPLIANCE

Glazing exposed to the sun must be of good quality and installed in compliance with glazing standards to guarantee the performance and durability of the film.



IMPORTANT NOTE

To ensure perfect uniformity across a project, it is recommended to exclusively use films from the same production batch and not mix different widths. Slight variations in tint or appearance may occur from one batch to another or depending on the widths, which could lead to visible differences once the strips are installed side by side.



1B1

CERTIFIED 2018 • EN 356



PERFORMANCE

EN 410

SUPPORT	PET
SUPPORT THICKNESS	200
PROTECTOR	Silicone PET
THICKNESS PROTECTOR	23
ADHESIVE	Acrylic polymer
TREATMENT	Anti-scratch
COLOR	colorless
APPLICATION FACE	Interior
BREAKAGE CHARGE	5 DA N/CM
EXTENSION OF THE BREAK	100%
GUARANTEE	10
APPLICATION TEMPERATURE	+ 5°C
APPLICATION	Soapy water



WARRANTY

10 years